




THINFIL

THINFIL-65

Model	□T-□G
Test Method	JIS B 9908 Light Scattering Integration
Efficiency	90%+, 60%+

Model Designators

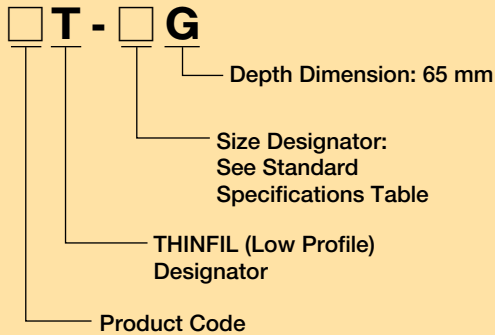


Standard Specifications

Model	Rated Airflow Volume (m ³ /min)	Pressure Drop (Pa)		External Dimensions (mm)			Average Efficiency (%)	Weight (kg)
		Initial Max	Final	Height	Width	Depth		
6T-320G	26	108	343	610	305	65	60+	1.9
6T-600G	56			610	610			3.1
6T-830G	70			610	762			3.7
9T-320G	26	147	343	610	305		90+	1.9
9T-600G	56			610	610			3.1
9T-830G	70			610	762			3.7

Custom sizes available. Please contact us for more information

Component Materials / Usage Specifications

Model		□T-□G
Component Materials	Media	Glass Fiber
	Separator	Hot Melt Resin
	Frame	Aluminum + Anodized Aluminum Clear Acrylic Coating
	Faceguard	Aluminum Lath
	Sealant	Urethane Resin
	Gasket	Chloroprene
Usage Specifications	Max. Continuous Operation Temperature (C)	60
	Max. Peak Humidity (%RH at 0 Condensation)	100

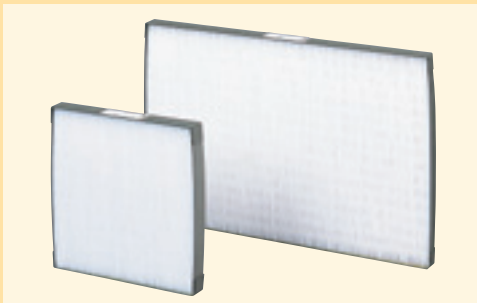


Aero-Answer Slim

AERO-ANSWER SLIM

Model	AAS□□-□
Test Method	JIS B 9908 Light Scattering Integration
Efficiency	98%+, 90-95%, 60-65%

Model Designators

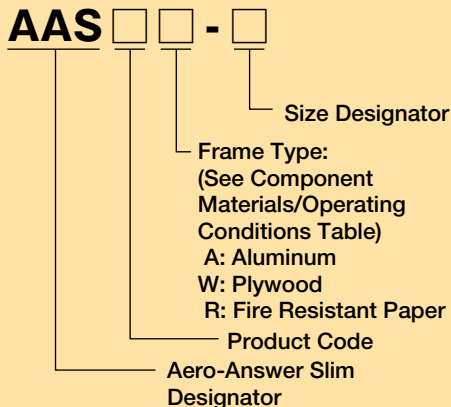

Standard Specifications

Model	Rated Airflow Volume (m ³ /min)	Pressure Drop (Pa)		External Dimensions (mm)			Average Efficiency (%)	Weight (kg)
		Initial Max	Final	Height	Width	Depth		
AAS6□-610610	20	17	100	610	610	35	60-65	1.1
AAS6□-610305	9.5			610	305			0.7
AAS9□-610610	20	39	100	610	610	35	90-95	1.1
AAS9□-610305	9.5			610	305			0.7
AAS98□-610610	20	65	120	610	610	35	98+	1.1
AAS98□-610305	9.5			610	305			0.7

Custom sizes available. Please contact us for more information.

Component Materials / Usage Specifications

Model		A	W	R
Component Materials	Media	Non-Woven Media		
	Frame	Aluminum	Plywood	Fire Resistant Paper
	Sealant	Hot Melt Resin		
	Gasket	Chloroprene		—
Usage Specifications	Max. Temperature (C)	60		
	Max. Continuous Operation Temperature (C)	40		
	Max. Peak Humidity (%RH at 0 Condensation)	98		